



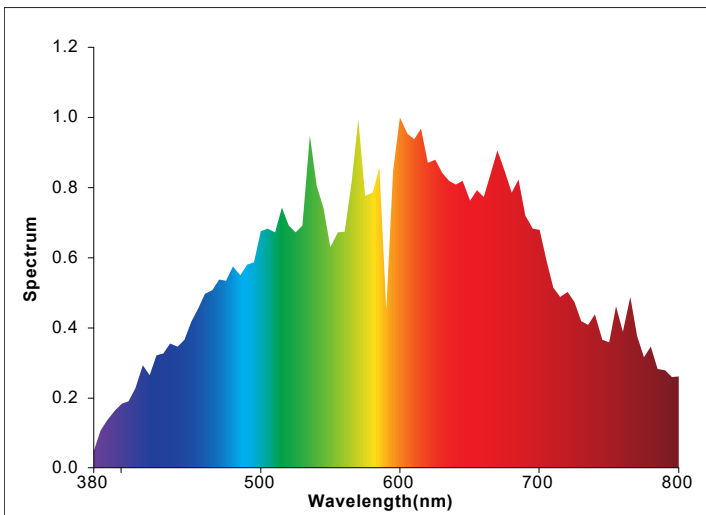

MAX YIELD · SUPERIOR QUALITY

1000W 4000K DE CERAMIC METAL HALIDE

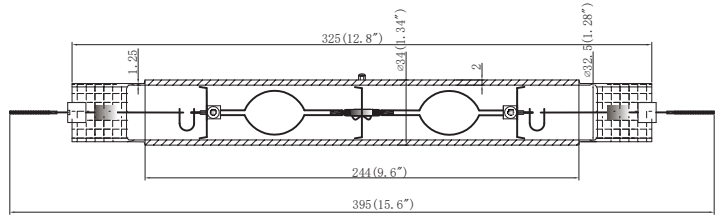

Color & Photo Parameters

Correlated Color Temperature (CCT)

4000K

Color Rendering Index (CRI/Ra)

98

Light Output

103,000 Lumens

Lumen Maintenance

90% @8,000 Hours

Efficacy

103 Lumens/Watt

Photosynthetic Photo Flux

1785 $\mu\text{mol/s}$

General Parameters

Part number

CL1000W40KDE

Burning position

HOR \pm 15 $^\circ$

Cap-base

Double End (K12x30S)

Fixture type

Open or Enclose

Rated life

15,000 Hours

Power (Rated)

1000W

Lamp Current Run-Up

8.3A@120V OR 4.1A@240V OR 3.6A@277V

Ignition Peak Voltage

4000-5000V

Voltage

120-277V

Bulb Finish

Clear

Overall Length

15.6"

Mercury (Hg) Content

Yes

Bulb Temperature (MAX)

1292 $^\circ$ F

Warranty

1 Year

Warranty only provided if used in low frequency ballast